

重型 Heavy



用于操纵控制器的
回转驱动副。


Manipulator for
turning concrete parts
with slewing drive.




对混凝土搅拌车
16.5M的传送带,可通过
两个回转驱动副带动。
过长的传送带产生大的
倾覆力矩,所以要使用
双回转驱动副加强支
撑。

Cement mixer equipped
with a conveyor belt with a
length of 16.5m, which is
rotated with two slewing
drive; the considerable
length of the belt leads to
high tilting moments.
Therefore a double row
design with a reinforced
housing is used.





SSDX-HH0342 (H14")

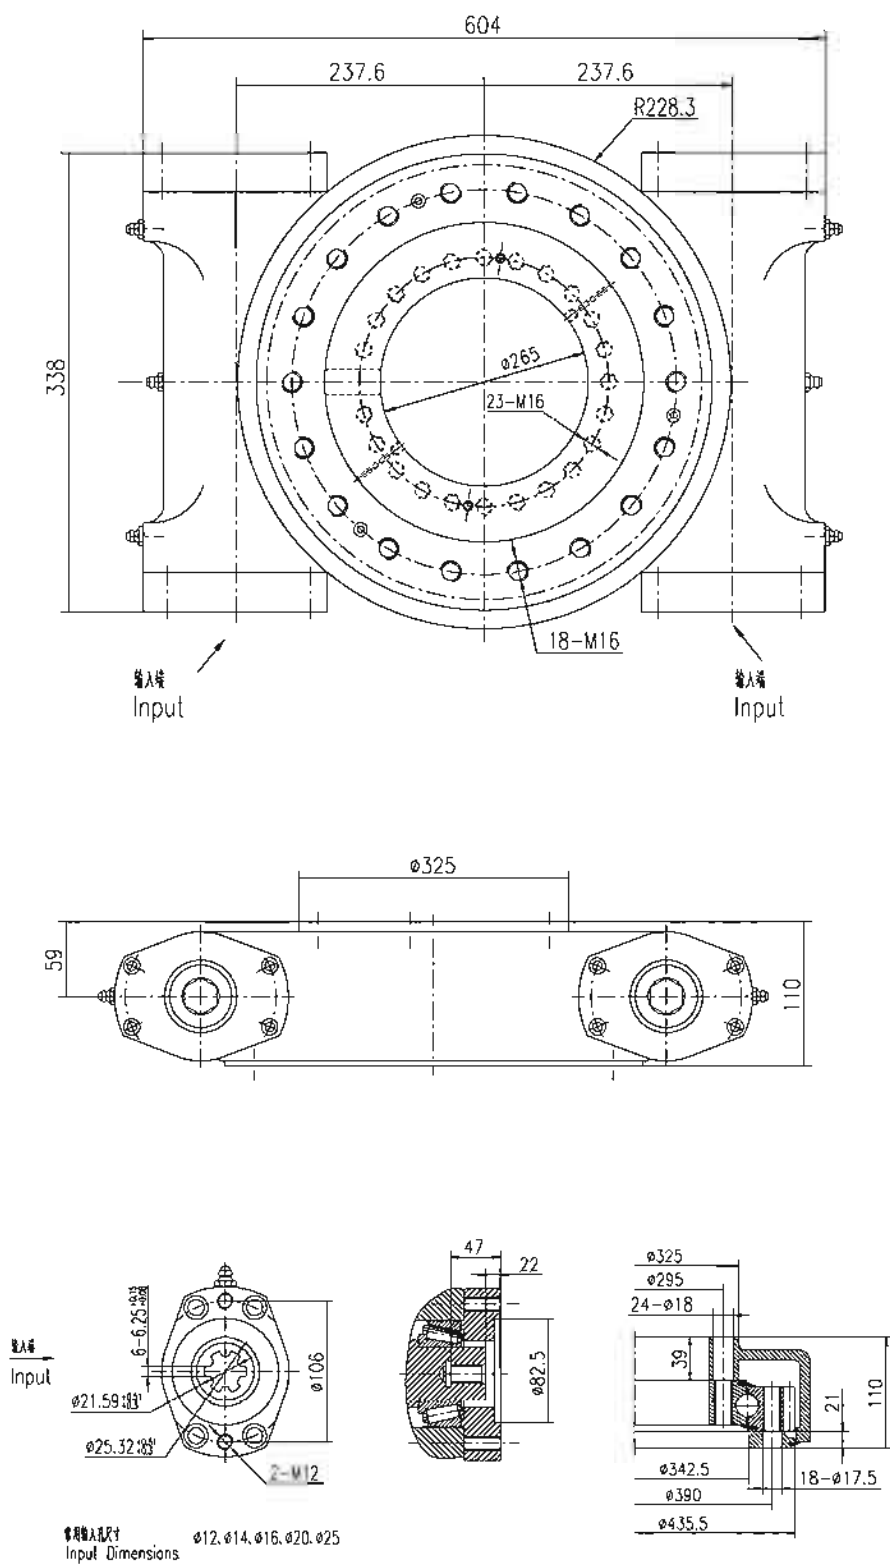

SSDX-HH0342 (H14")

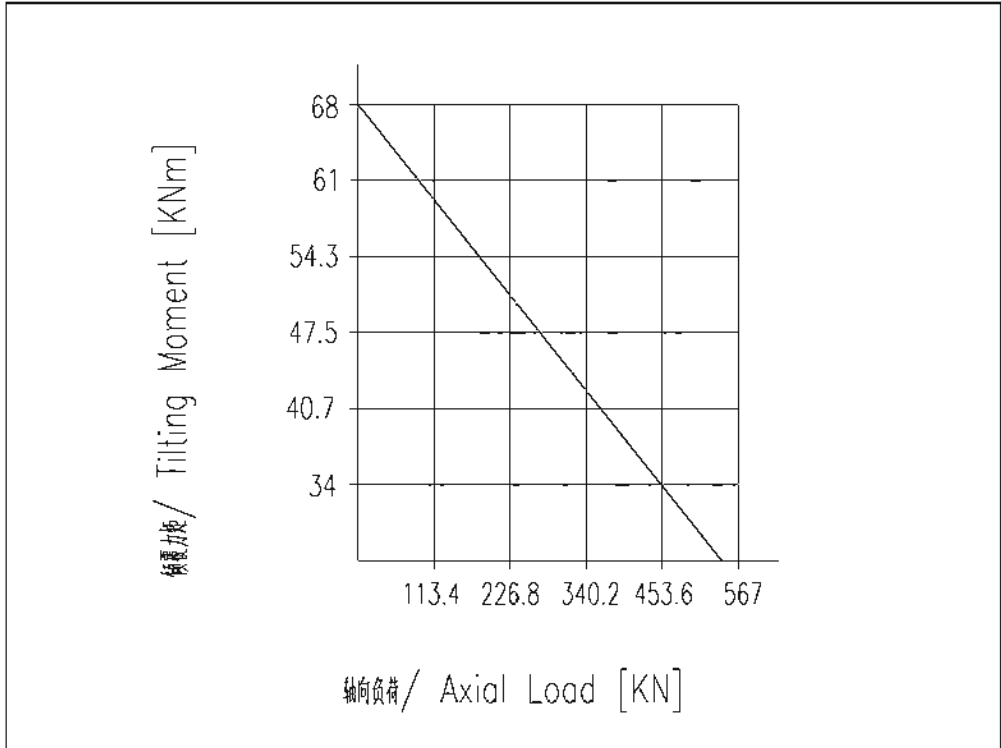



SSDX-HH0342					
模数 (Module)	5	[mm]	输出转矩 (Output Torque)	12	[kNm]
蜗杆头数 (Number of worm shafts)	1	—	反向保持转矩 (Backwards Holding Torque)	48	[kNm]
传动比 (Gear Ratio)	85: 1	—	倾覆力矩 (Tilting Moment)	67.8	[kNm]
效率 (Efficiency)	40%	—	径向额定静负荷 (Static load rating,Radial)	222	[kN]
自锁齿轮 (Self-locking Gears)	Yes	—	轴向额定静负荷 (Static load rating,Axial)	555	[kN]
重量 (Weight)	76	[kg]	径向额定动负荷 (Dynamic load rating,Radial)	117	[kN]
			轴向额定动负荷 (Dynamic load rating,Axial)	133	[kN]

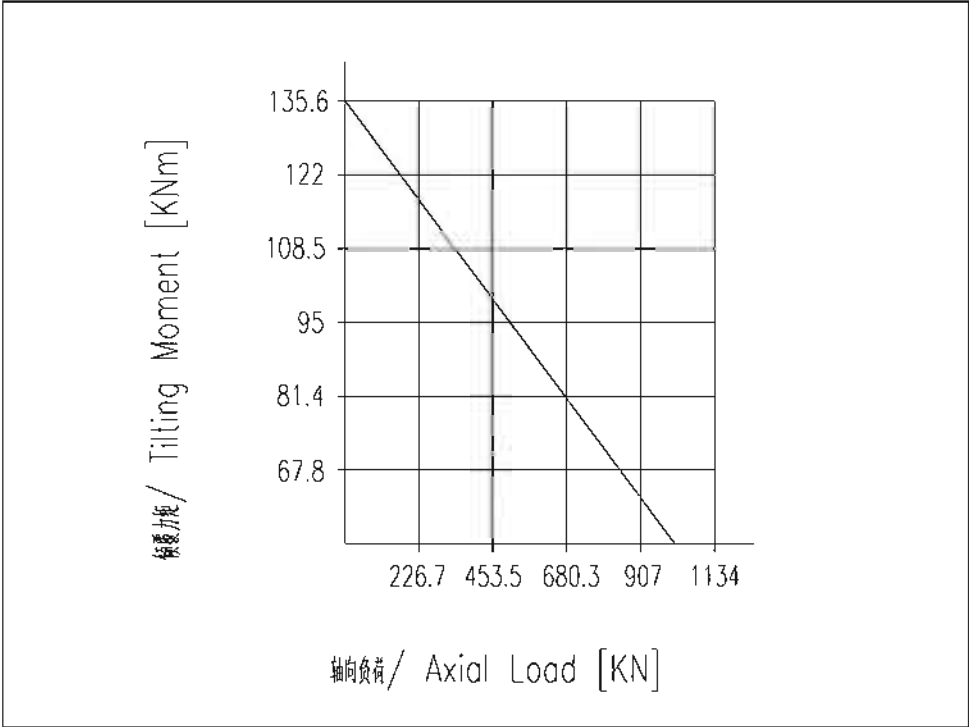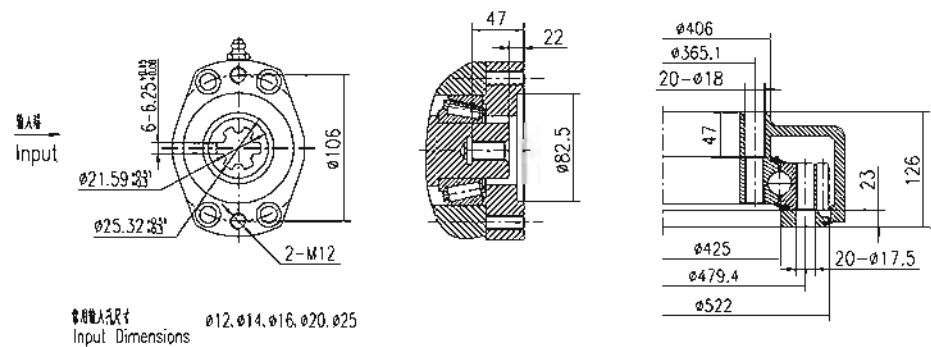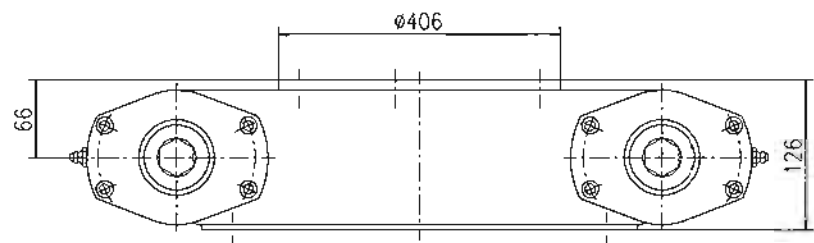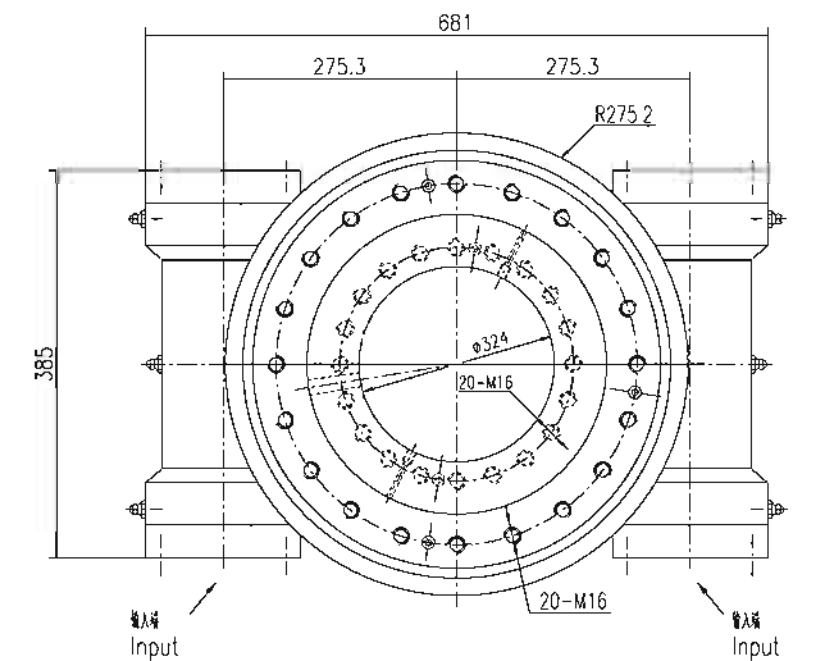

SSDX-HH0424				
模数 (Module)	5	[mm]	输出转矩 (Output Torque)	16.8 [KNm]
蜗杆头数 (Number of worm shafts)	1	—	反向保持转矩 (Backwards Holding Torque)	72.3 [KNm]
传动比 (Gear Ratio)	102: 1	—	倾覆力矩 (Tilting Moment)	135.6 [KNm]
功率 (Efficiency)	40%	—	径向额定静负荷 (Static load rating,Radial)	390 [KN]
自锁齿轮 (Self-locking Gears)	Yes	—	轴向额定静负荷 (Static load rating,Axial)	970 [KN]
重量 (Weight)	119	[kg]	径向额定动负荷 (Dynamic load rating,Radial)	205 [KN]
			轴向额定动负荷 (Dynamic load rating,Axial)	235 [KN]

SSDX-HH0525 (H21")





SSDX-HH0525 (H21")

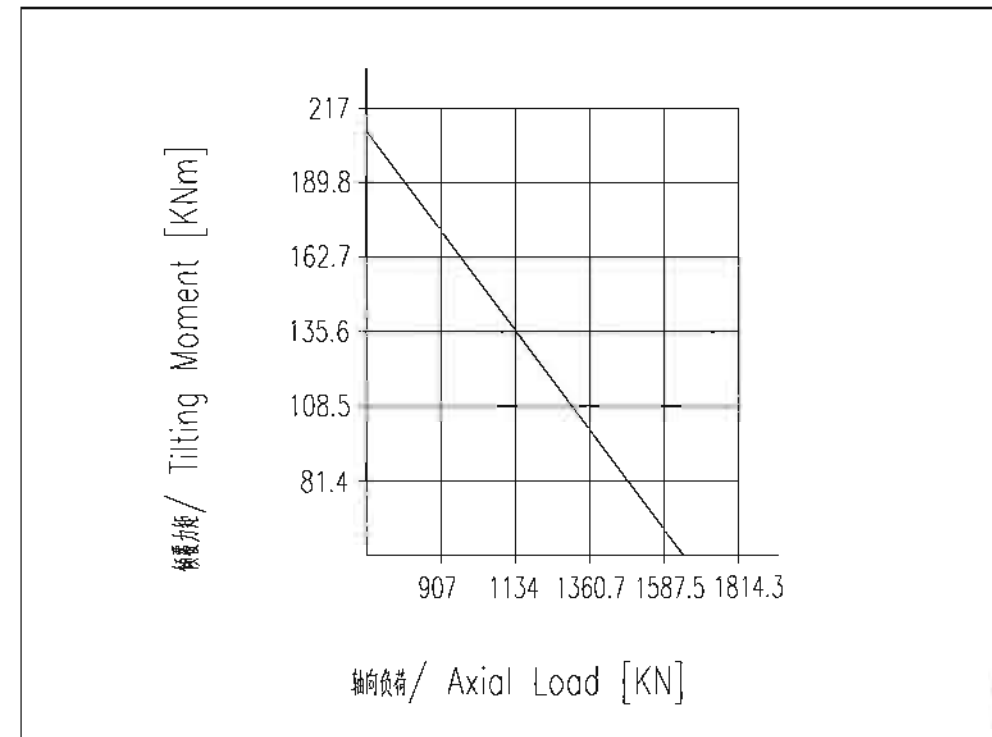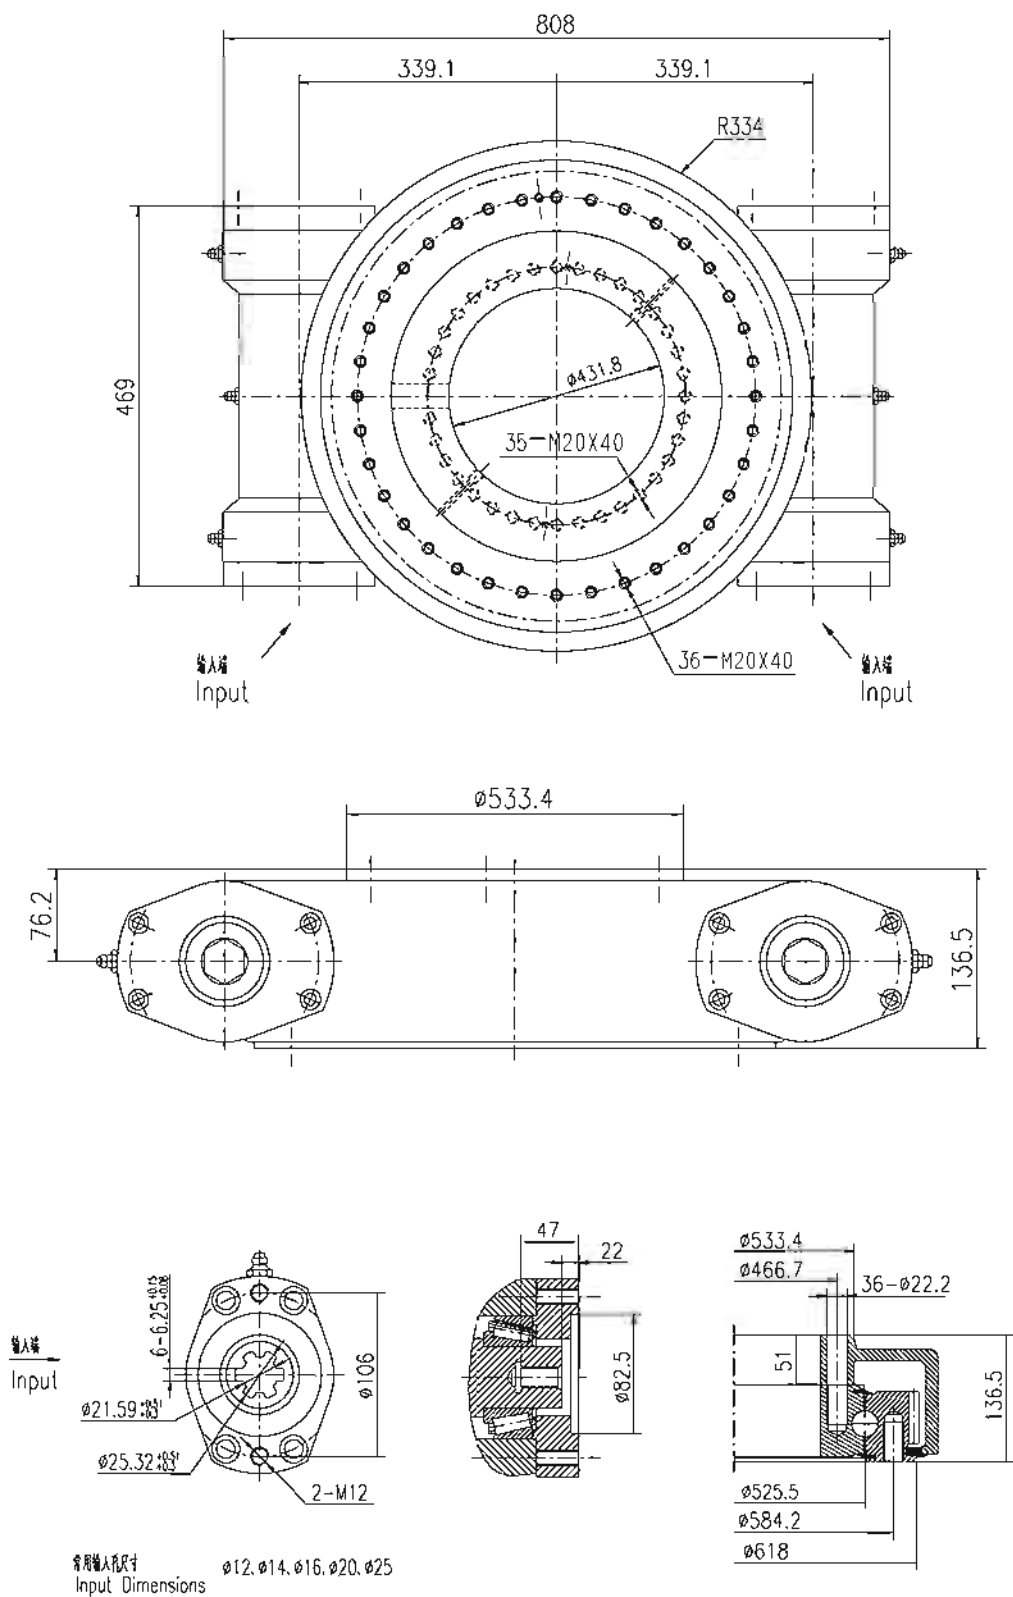

SSDX-HH0525				
模数 (Module)	5	[mm]	输出转矩 (Output Torque)	20.6 [kNm]
蜗杆头数 (Number of worm shafts)	1	—	反向保持力矩 (Backwards Holding Torque)	105.8 [kNm]
传动比 (Gear Ratio)	125: 1	—	倾覆力矩 (Tilting Moment)	203 [kNm]
功率 (Efficiency)	40%	—	径向额定静负荷 (Static load rating,Radial)	640 [kN]
自锁齿轮 (Self-locking Gears)	Yes	—	轴向额定静负荷 (Static load rating,Axial)	1598 [kN]
重量 (Weight)	161	[kg]	径向额定动负荷 (Dynamic load rating,Radial)	335 [kN]
			轴向额定动负荷 (Dynamic load rating,Axial)	385 [kN]

SSDX-HH0620 (H25")

SSDX-HH0620 (H25")

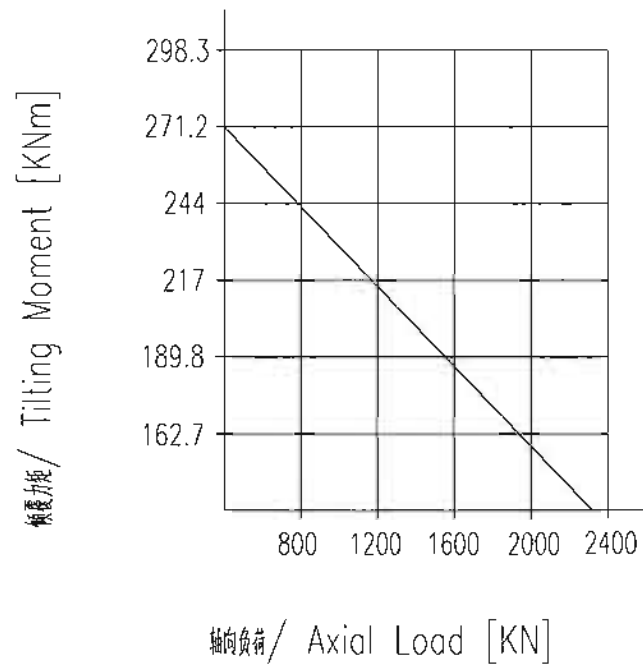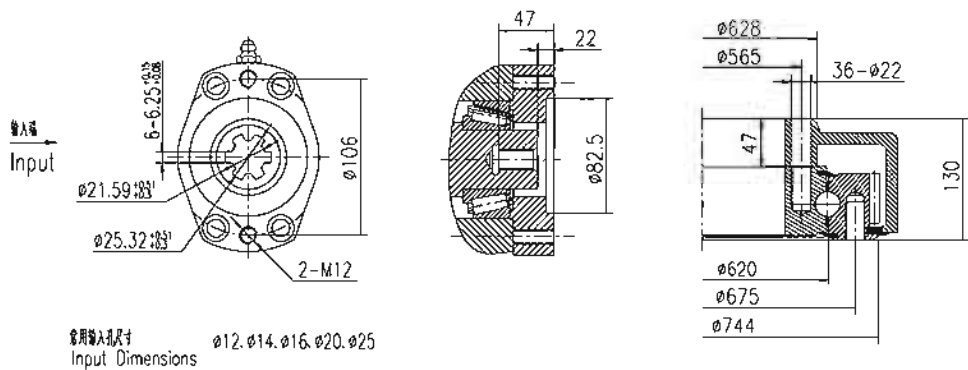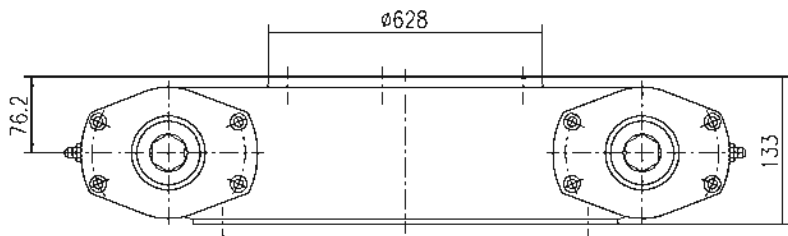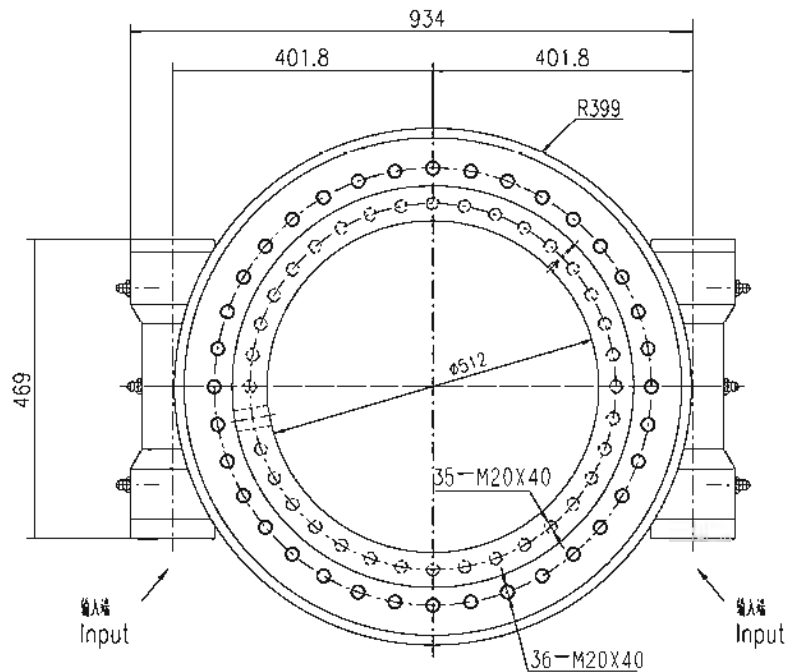

SSDX-HH0620					
模数 (Module)	5	[mm]	输出转矩 (Output Torque)	28	[KNm]
蜗杆头数 (Number of worm shafts)	1	—	反向保持转矩 (Backwards Holding Torque)	158.3	[KNm]
传动比 (Gear Ratio)	150: 1	—	倾覆力矩 (Tilting Moment)	271	[KNm]
效率 (Efficiency)	40%	—	径向额定静负荷 (Static load rating,Radial)	945	[KN]
自锁齿轮 (Self-locking Gears)	Yes	—	轴向额定静负荷 (Static load rating,Axial)	2360	[KN]
重量 (Weight)	222	[kg]	径向额定动负荷 (Dynamic load rating,Radial)	470	[KN]
			轴向额定动负荷 (Dynamic load rating,Axial)	590	[KN]